



(11) Publication number: **0 502 716 A2**

(12) **EUROPEAN PATENT APPLICATION**

(21) Application number: **92301866.7**

(51) Int. Cl.⁵: **B65D 39/04, B65D 39/08, B65D 39/16**

(22) Date of filing: **04.03.92**

(30) Priority: **05.03.91 US 664658**

(43) Date of publication of application:
09.09.92 Bulletin 92/37

(84) Designated Contracting States:
AT BE CH DE DK ES FR GB GR IT LI LU MC NL PT SE

(71) Applicant: **CAP SNAP CO.**
890 Faulstich Court
San José California 95112 (US)

(72) Inventor: **Luch, Daniel**
890 Faulstich Court
San Jose, California 95112 (US)
Inventor: **Adams, Brian M.**
890 Faulstich Court
San Jose, California 95112 (US)

(74) Representative: **Mayes, Stuart David et al**
BOULT, WADE & TENNANT 27 Farnival Street
London, EC4A 1PQ (GB)

(54) **Spout fitment closure plug.**

(57) For tent-type paperboard containers as well as other containers, a fitment (41) is attached surrounding a hole (22) in the container (21). The spout (42) has internal threads (44) and an external flange (47) which seals around the hole (22) and is fixed to the container (21) by thermal means, adhesive or the like. The cap (51) has a top disk (52) from which an externally threaded skirt (54) depends. The exterior of the skirt (54) has gripping ribs (56) to assist in screwing and unscrewing the cap (51). The lower edge (66) of the skirt (54) seals against a sealing membrane (48) on the spout (42). Surrounding the skirt (54) is a tamper-evident band (61) attached to the lower edges of the ribs (56) by frangible bridges (62). The tamper-evident band (61) has locking means (63) engaging complementary locking means (46) on the spout (42). Thus the cap (51) cannot be unscrewed without removing the tamper-evident band (61). By unique design, the spout (42) and cap (51) may be molded in one mold cavity.

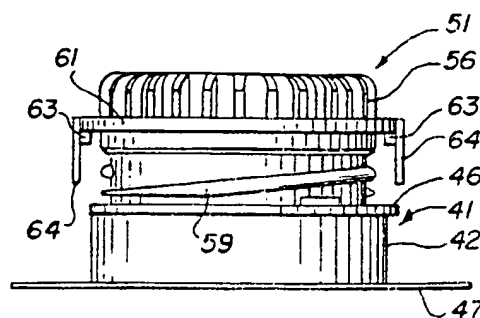


Fig.2



Fig. 3

BACKGROUND OF THE INVENTION

Field of the Invention

This invention relates to a new and improved spout fitment and plug for closing the same. More particularly the invention relates to a fitment which fits around a hole in a panel of a paperboard carton or around a hole in a flexible container, or the like, such as used for packaging liquid products and powders and to a closure for such fitment.

Description of Related Art

A typical prior art fitment and cap is shown in Fig. 1 of the accompanying drawings and is discussed in the preferred embodiments portion of this specification. Generally speaking, prior fitments have spouts with external threads closed by caps with internal threads. Some fitments are used in conjunction with plastic bag containers, the fitment being integrally welded to the plastic bag. Other prior art fitments are attached to a polymer-coated paperboard container such as a gable-topped half-gallon container. Generally, prior art fitments for paperboard cartons include a thin flange which is welded to the surface of the container. The closure includes a foil seal which seals the mouth of the spout and a liner for the cap which serves a resealing function. Attachment to the polymer-coated paperboard is accomplished by welding the flange of the spout to the polymer coating. Upon initial removal, the tamper-evident foil seal is removed and discarded.

Fitments of the prior art have a number of deficiencies as compared with the present invention. In the first place, they employ multiple components which increase the cost of the combination very greatly over the simple structure of the present invention. Secondly, assembly is difficult and involves rotary equipment which is difficult to control in practice and is expensive to install. Thirdly, because of the fact that the prior art spouts are externally threaded, the diameter of the opening in the spout is restricted inasmuch as there is only limited space on the panel of the container on which the flange can be located, thereby reducing the diameter of the fitment flange and correspondingly the diameter of the spout. Finally, commercially available fitment-closure combinations have no external tamper-evident features (as contrasted with the internal foil seal of the spout opening).

SUMMARY OF THE INVENTION

One embodiment of the present invention employs a fitment having a spout which is internally threaded and having a flange or other means which is welded or otherwise adhered to the container panel on which the fitment is installed. The closure is an

externally threaded plug closure which seals against a membrane on the fitment, which membrane also protects the exposed edge of the hole formed in the container panel. A tamper-evident band on the closure is joined to the closure by a plurality of frangible bridges or the parts may be initially connected by other frangible means. Assembly of the cap on the fitment is preferably performed by a direct axial pushing movement, the threads slipping past each other during the axial movement. The lower edge of the tamper-evident band has engagement means which fit into complementary engagement means on the spout. The inter-engagement of these means prevents rotation of the cap so long as the bridges which join the band to the cap are intact. Thus, after axial assembly the threaded plug cannot be removed prior to removal of the tamper evident band.

As an additional feature, the plug and spout may be molded simultaneously in a single cavity in an injection molding machine. Further, as the parts are ejected from the cavity, the threaded plug may be moved axially so that it fits inside the spout and the threads of the spout and plug inter-engage.

In another embodiment, the parts may be interfitted by a friction fit between the exterior of the plug and the interior of the spout.

As those skilled in the art will realize, materials such as polyolefins having relatively high flexibility and toughness will be most suitable in practice of the invention.

DESCRIPTION OF DRAWINGS

The accompanying drawings, which are incorporated in and form a part of this specification, illustrate embodiments of the invention and, together with the description, serve to explain the principles of the invention:

Fig. 1 is a fragmentary sectional view of a portion of a prior art fitment and closure assembly.

Fig. 2 is a side elevational view of a fitment and closure in accordance with the present invention prior to assembly.

Fig. 3 is an enlarged fragmentary sectional view through an assembled closure and fitment attached to the panel of a container.

Fig. 4 is a top plan view of a fitment.

Fig. 5 is a top plan view of a closure.

Figs. 6, 7, 8 and 9 are fragmentary sectional views taken substantially along the lines 6--6, 7--7, and 8--8 and 9--9, respectively, of Fig. 5.

Fig. 10 is an enlarged vertical sectional view through the structure of Fig. 2.

Fig. 11 is a fragmentary sectional view similar to structure to Fig. 10 but angularly rotated to show the integral connection between closure and spout.

Figs. 12, 13, and 14 are, respectively, modifications of the structure of Figs. 1-11, taken substan-

tially along the same lines as Fig. 11.

Fig. 15 is a view similar to Fig. 14 of still another modified combination.

Fig. 16 is a top plan view of a still further modification of the invention.

Fig. 17 is a vertical sectional view taken substantially along line 17--17 of Fig. 16 showing the combined closure and fitment in initial condition.

Fig. 18 is a view similar to Fig. 17 showing the parts in re-closure position.

Figs. 19 and 20 are vertical sectional views of a modification showing a different mechanism for attachment to the container.

DESCRIPTION OF PREFERRED EMBODIMENTS

Reference will now be made in detail to the preferred embodiments of the invention, examples of which are illustrated in the accompanying drawings. While the invention will be described in conjunction with the preferred embodiments, it will be understood that they are not intended to limit the invention to those embodiments. On the contrary, the invention is intended to cover alternatives, modifications and equivalents, which may be included within the spirit and scope of the invention as defined by the appended claims.

Directing attention now to the typical prior art structure shown in Fig. 1, a carton of paperboard coated with a suitable polymer has a panel 21 formed with a hole 22. Surrounding hole 22 is a fitment 23 having an upstanding spout 24 formed with external threads 26. The lower edge of spout 24 has an external flange 27 which is caused to adhere to the panel 21 by welding, adhesive or other suitable means.

The prior art cap 31 has a top disk 32 from which depends a skirt 33 having internal threads 34 mating with the threads 26. Initially, the cap 31 may be provided with a liner 36 which functions as a re-closure seal and also with a foil seal 37 which seals against the upper end of the spout 24 and provides tamper-evident features. Once the seal 37 is removed, the liner 36 performs a sealing function on re-closure.

Some of the advantages of the present invention over prior art structures such as the typical assembly shown in Fig. 1 have heretofore been described.

A preferred structure of the present invention is shown in Figs. 2 - 11. Fitment 41 has an upstanding spout 42 formed with a top edge 43 and having internal threads 44. Preferably the threads 44 are multiple lead threads, since (as hereinafter described) this balances the gating of the spout (see below descriptions of Figs. 10 and 11).

Below threads 44, spout is formed with a downward-inward slanted seal membrane 48 which, as shown in Fig. 3, performs a sealing function with the closure as hereinafter appears. Diametrically opposed ratchets 46 are formed in the top edge 43 for

the purpose of locking with the tamper-evident band of the closure as hereinafter appears. At the bottom of the fitment is an enlarged peripheral flange 47, the underside of which is caused to adhere to the panel 21.

Closure 51 functions as a plug to close the spout 42. It is formed with a top disk 52 having a rounded corner 53 from which depends a skirt 54. The upper portion of skirt 54 is formed with vertical ribs 56 which extend around the corner 53 and partially inward of the disk 52. Ribs 56 are separated by spaces 57. By gripping the ribs 56 the user may turn the closure 51. Midway of the skirt 54 and immediately below the ribs 56 is an external wall 58 and below the wall 58 are threads 59 which mate with the threads 44.

Surrounding the skirt 54 is a narrow tamper-evident band 61 which is connected to the lower ends of some of the ribs 56 by horizontal frangible bridges 62. At diametrically spaced positions on the under side of band 61 are depending pawls 63 which engage the ratchets 46 of spout 42 to restrain rotation of closure 51 relative to fitment 41 so long as the bridges 62 are intact. One or more tear tabs 64 (here shown as two in number and depending from band 61 immediately outward of pawls 63) are attached to the band 61. By pulling the tab 64 outward, the band 61 may be disconnected from the closure 51 and the closure may be turned relative to the fitment since the pawls 63 are out of engagement with the ratchets 46. However, the removal of band 61 or any tearing of the bridges 62 gives evidence of tampering with the contents of the container. To facilitate removal, bridges 62 are omitted in the vicinity of tear tabs 63 (See Figs. 3, 5 and 6).

The consumer may turn closure 51 to open and close the container. In the closed condition, the end 66 of the skirt 54 seals against the seal member 48 of fitment 41.

One preferred means for the production of the fitment 41 and closure 51 is shown in Figs. 10 and 11 whereby the two parts may be made simultaneously in a single cavity of a plastic injection mold. Thus in the mold, the fitment 41 is positioned below the closure 51. As shown in Fig. 11, there are gates 71 connecting the fitment to the closure. Gates 71 are positioned to coincide with the theoretical projections of the lower ends (or run-outs) of helical threads 59. The plastic is injected at the top of the closure and the molten plastic extends through the gate 71 into the top of the spout 42. Accordingly the two parts may be molded simultaneously. In order to separate the parts, the gate 71 is fractured. Such fracture may be accomplished merely by pushing axially downward on the closure, the threads 59 slipping over the threads 44. It will be understood, however, that the parts may be molded separately. When molded simultaneously, by proper mold construction, the parts may be assembled before being ejected from the mold.

Fig. 12 illustrates an alternate construction. In this modification, a continuous frangible web connection 76 connects the plug to the top edge 43a circumferentially around the parts. The parts may be installed on the container in the condition shown in Fig. 12. So long as the connector 76 is intact, the consumer is assured that there has been no tampering with the container. At the time of consumption, the user fractures the connection 76 either by twisting the closure 51a or other convenient means. The closure 51a may be installed on the fitment 41a after part of the contents of the container have been dispensed merely by screwing the closure 51a into the spout 42a.

In the form of the invention shown in Fig. 13, which is particularly useful where the device is to be attached to a container having solid contents, the lower end of the fitment 41b has a downward extending ring 81 which fits inside the hole 22 and is retained therein by an outward extending barb 82 which engages under the panel 21. To stabilize and also to seal the fitment, an outer seal member 83 similar to the seal member 48b engages the top surface of the panel 21. In Fig. 13 the parts are shown prior to assembly of the plug to fitment spout. It will be understood that normally a closure 51b is attached to the fitment 41b before the ring 81 is inserted in the panel 21.

Fig. 14 shows still another modification. The structure in Fig. 14 is substantially similar to that in Fig. 13 except that the stabilizing seal member 83 of Fig. 13 is omitted.

Fig. 15 shows a very simple, tamper-evident construction. No threads are required on the closure or spout. Rather, the exterior of skirt 54d, immediately below ribs 56d is formed with a cylindrical external sealing surface 86 and below surface 86 is an undercut 87 merging into outward curved portion 88. Portion 88 extends around the circumference of closure 51d and is joined to the inner corner of top edge 43d of fitment 41d by a frangible circumferential web 76d.

Web 76d makes the combination tamper-evident since the container cannot be opened without breaking the same. When the consumer wishes to open the container, closure 51d is disconnected from fitment 41d by breaking web 76d by any convenient means. For reclosure purposes, sealing end 66d contacts seal member 48d.

Figs. 16-18 illustrate a further modification wherein the closure 51e and fitment 41e are molded together and, as initially molded, provide a tamper-evident combination which is liquid-tight. When the consumer separates the two parts, the closure may be used for reclosure purposes.

Thus spout 42e need not be threaded. Closure 51e is joined to the upper edge 43e of spout 42e in a frangible, continuous, circumferential tear band 91 which functions as a connection or gate during molding of the parts and further makes the parts in the condition shown in Fig. 17 tamper-evident. In the

preferred form best shown in Fig. 17, circumferential flange 96 extends horizontally out from top disk 52e beyond the confines of skirt 54e. At one or more positions around the circumference of band 91 is a pull tab 92, of limited width, which may extend up above the level of closure top disk 52e and out beyond the edge of flange 96 so that it is conveniently gripped by the consumer. Below the level of flange 96, tab 92 slants downward-inward to join tear band 91. At least one point, tab 92 is connected to the edge of flange 96 by one or more frangible bridges 94 which helps stabilize the tab and also makes additional contribution to tamper-evidency.

The flange 47e may be adhered around a hole in a container with the combination shown in Fig. 17 intact and tamper-evident since as long as bridge 94 and tear band 91 are intact the user cannot obtain access to the contents of the container. To open the container, the consumer grasps tab 92, breaking bridge 94 and then tear band 91. Closure 51e is then removed by gripping flange 96.

For reclosure skirt 54e is inserted in spout 42e and top 52e pushed downward. Collar 58e seals against the inside of spout 42e and seal member 48e seals against the outside of skirt 66e, both sealing with a friction fit. Flange 96 seats on top edge 43e, limiting downward movement of the closure. The closure 51e may be removed by gripping flange 96 and replaced repeatedly.

In the modification of Figs. 19-20, fitment 41f is applied to a container 101 of any convenient type such as one having an external locking bead 102 below top edge 103. Fitment 41f has an annular top 106 having upward extending spout 42f. The underside of top 106 has an inner skirt or hollow plug 107 which fits inside the wall of container 101. Outward of plug 107 is a groove 108 which receives edge 103 and beyond groove 108 is a shoulder 109 which fits against the upper outer edge of container wall 101. A peripheral short skirt 111 has an internal bead 112 which locks under bead 102.

The closure 51f is quite similar to that of Figs. 16-18 except that skirt 54f may be dimensioned to fit tightly within spout 42f without use of a collar such as collar 58e of Fig. 17. The lower edge of skirt 54f is bevelled and is initially connected by frangible connector 76f to the inner edge of the upper end of spout 42f.

The closure as shown in Fig. 19 is tamper-evident. The consumer grasps closure 51f, breaking connector 76f. For reclosure purposes, closure skirt 54f if inserted in spout 42f and pushed down to assume the closed position shown in Fig. 20.

In many respects the modifications of Figs. 12, 13, 14, 15, 17 and 19 resemble those of the preceding modifications, and the same reference numerals followed by the subscripts a, b, c, d, e and f, respectively, are used to designate corresponding parts.

Claims

1. An apparatus comprising in combination, a fitment and a closure therefore, said fitment comprising a spout having an interior and an exterior formed with internal first engagement means, attachment means for attaching said fitment vicinal an aperture in a container, said closure having a top a skirt having an interior and an exterior, said skirt depending from said top formed with external second engagement means engageable with said first engagement means, and breakable means interconnecting a portion of said fitment and said skirt, said breakable means being positioned so that said closure cannot be moved relative to said fitment without breaking said breakable means, first tamper-evident means on said fitment, second tamper-evident means on said closure co-operable with said first tamper-evident means to restrain removal of said skirt from said spout after said first and second tamper-evident means are brought into engagement, at least one of said tamper-evident means being frangible, said tamper-evident means being discrete from breakable means.
 2. The apparatus of Claim 1 in which said first and second engagement means have a friction fit.
 3. The apparatus of claim 1 in which said second engagement means comprises a collar on the exterior of said skirt which engages the interior of said spout.
 4. The apparatus of Claim 1 in which said second tamper-evident means comprises a tamper-evident band surrounding and spaced outward of said skirt, said band being connected to said skirt by second frangible means, and restraining said band functioning after initial engagement of said first and second engagement means to restrain removal of said closure from said fitment so long as said second frangible means is intact.
 5. The apparatus of Claim 4 which further comprises first and second co-operating locking means on said band and said fitment, respectively, to restrain, after said initial engagement, rotation of said closure relative to said fitment while said band is in position prior to fracture of said second frangible means.
 6. The apparatus of Claim 5 in which said first locking means comprises a pawl and said second locking means comprises a ratchet interfitting with said pawl said band.
 7. An apparatus comprising in combination a closure and a fitment for attachment to a container for initial sealing, dispensing, and reclosure of said container,
 - said closure comprising a plug portion having a top and a cylindrical skirt depending from said top, and first engagement means on the exterior of said cylindrical skirt,
 - said fitment comprising a spout portion having an internal wall and second engagement means on said internal wall,
 - said first and second engagement means being angularly positioned such that they can be brought into complementary registration with a unidirectional axial force sufficient to insert the plug portion into the spout portion,
 - said plug and spout being integrally joined together through a line of weakness so that said plug and spout may be formed simultaneously in a single shot injection molding cycle, first tamper-evident means on said fitment, second tamper-evident means on said closure co-operable with said first tamper-evident means to restrain movement of said skirt relative to said spout after said first and second tamper-evident means are brought into engagement by said unidirectional axial force at least one of said tamper-evident means being frangible.
 8. An apparatus comprising a fitment for use with a closure having a plug portion having a top and a cylindrical skirt depending from said top, and first engagement means on the exterior of said cylindrical skirt, said second engagement means comprising internal threads,
 - said fitment comprising a spout portion having an internal wall and second engagement means on its internal wall,
 - said first and second engagement means being angularly positioned such that they can be brought into complementary registration with a unidirectional axial force sufficient to insert the plug portion into the spout portion.
 - said plug and spout being integrally joined together through a line of weakness so that said plug and spout may be formed simultaneously in a single shot injection molding cycle.
 9. The apparatus of Claim 8 in which said line of weakness is adjacent to and extends the circumference of said spout portion.
 10. An apparatus comprising a closure cap for use with a fitment having a spout formed with internal first engagement means, attachment means for attaching said fitment vicinal, an aperture in a container, and first tamper-evident means said closure comprising a top, a skirt depending from said top formed with external second engage-

- ment means engageable with said first engagement means, and integral frangible means interconnecting a portion of said fitment and said skirt, said frangible means being positioned so that said closure cannot be moved relative to said fitment without breaking said frangible means, a tamper-evident band surrounding and spaced outward of said skirt, said band engaging said first tamper-evident means and being connected to said skirt through second frangible means, said second frangible means restraining removal of said closure from said fitment after initial engagement of said first and second engagement means so long as said second frangible means is intact, said first tamper-evident means and said band restraining movement of said closure relative to said fitment while said band is in position prior to fracture of said second frangible means, said first engagement means comprising a pawl and said second engagement means comprising a ratchet on said skirt interengaging with said pawl.
11. The apparatus of Claim 4 or Claim 10 in which said skirt is formed with external gripping ribs, the lower ends of at least some of said ribs being joined to said band by bridges, said bridges comprising said second frangible means.
12. The apparatus of Claim 4 or Claim 10 in which said second frangible means comprise angularly spaced bridges.
13. An apparatus comprising a closure for use with a fitment for attachment to a container for initial sealing, dispensing, and reclosure of said container, said fitment having a spout portion having an internal wall and internal engagement means on said internal wall,
 said closure a plug portion having a top and a cylindrical skirt having an interior and an exterior depending from said top, and external engagement means on the exterior of said cylindrical skirt,
 said internal and external engagement means being angularly positioned such that they can be brought into complementary registration with a unidirectional axial force sufficient to insert the plug portion into the spout portion,
 said plug and spout being initially integrally joined together through a line of weakness so that said plug and spout may be formed simultaneously in a single shot injection molding cycle.
14. The apparatus of Claim 7 or Claim 13 in which said line of weakness is adjacent to and extends the circumference of said closure.
15. The apparatus of Claim 14 in which said line of
- weakness is formed by a plurality of discrete bridges angularly spaced around the circumference of said fitment.
16. The apparatus of Claim 1 or Claim 3 in which said attachment means comprises a ring fitting through said aperture and a barb on said ring.
17. The apparatus of Claim 16 which further comprises a sealing member extending from said ring inside said spout.
18. The apparatus of Claim 17 which further comprises a second sealing member extending outward of said ring to engage the exterior of said container.

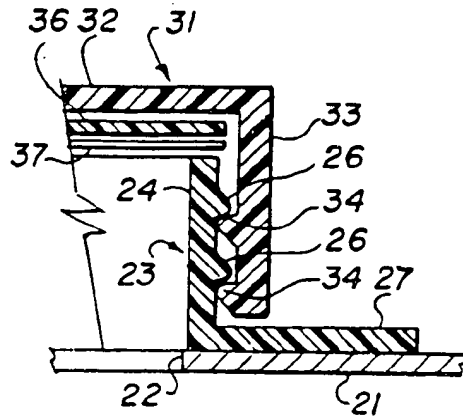


Fig. 1
PRIOR ART

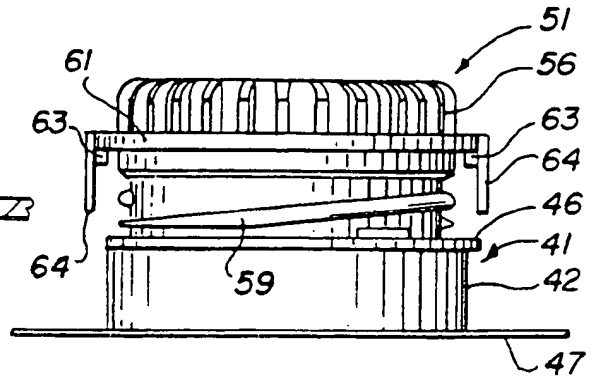


Fig. 2

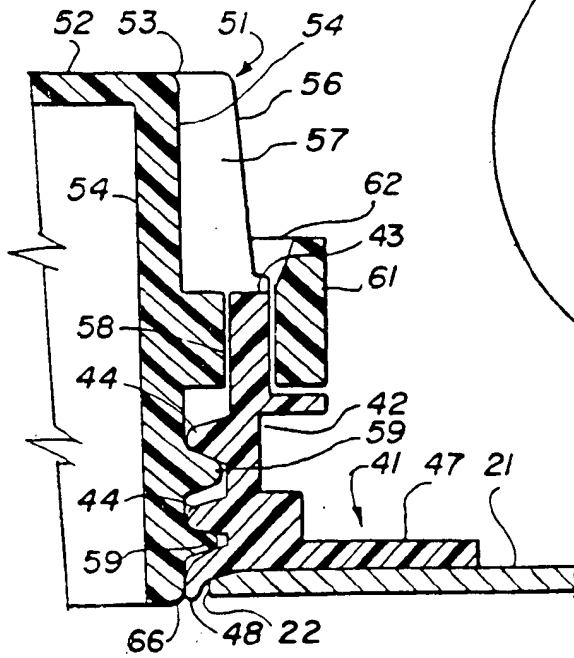


Fig. 3

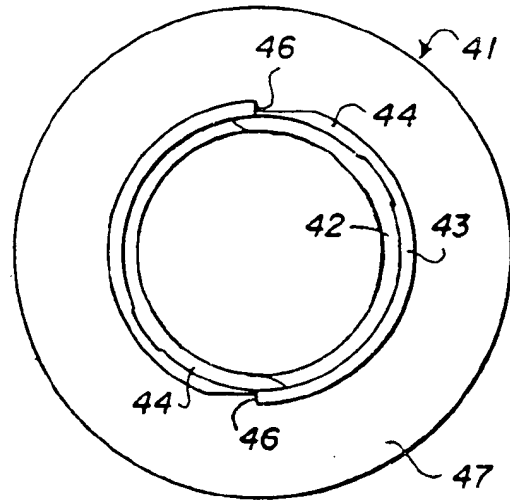
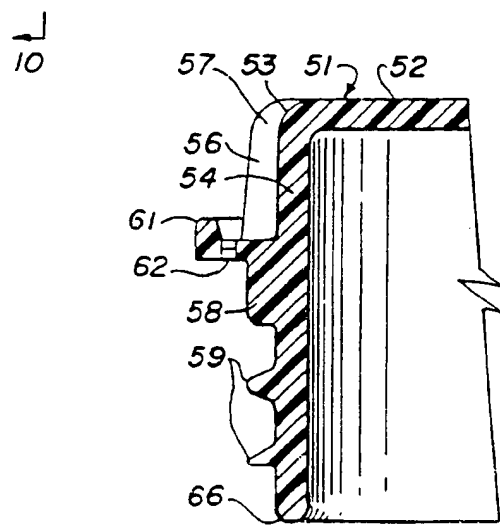
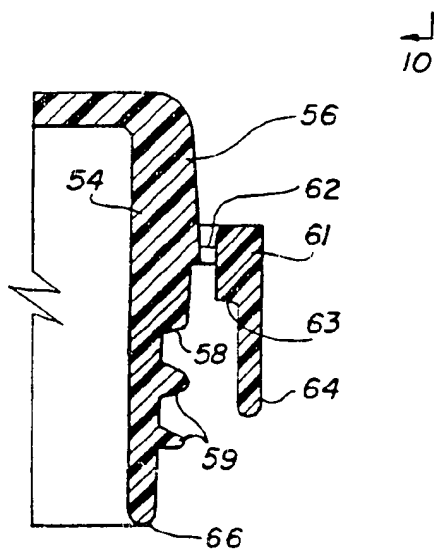
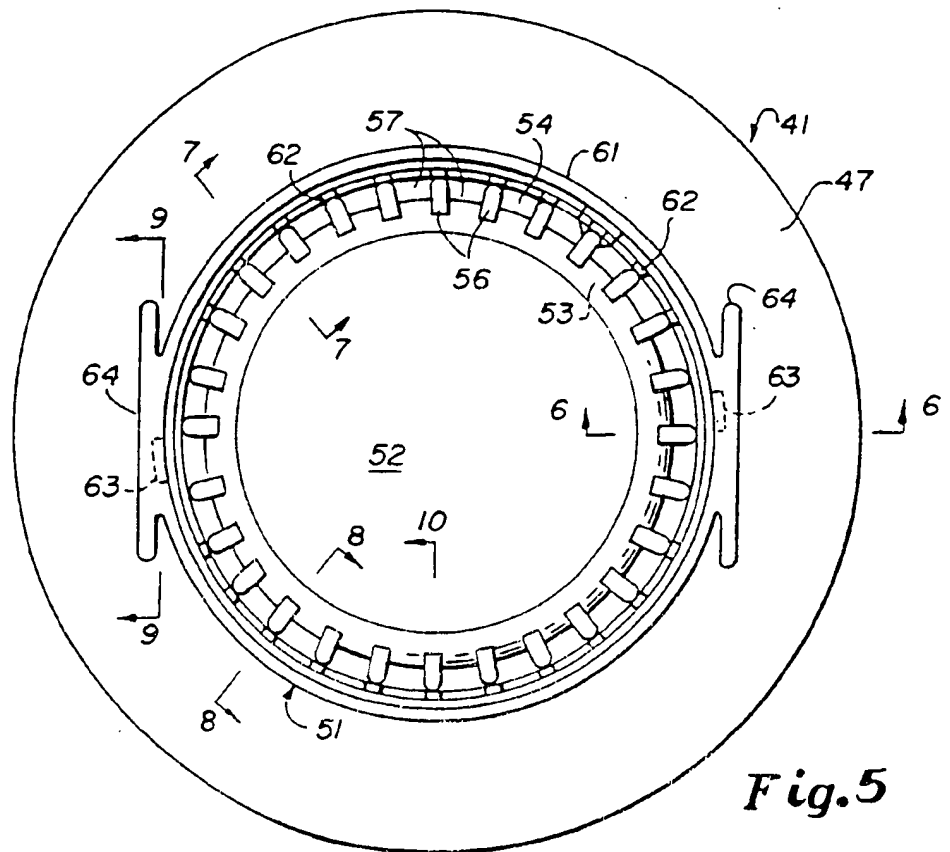


Fig. 4



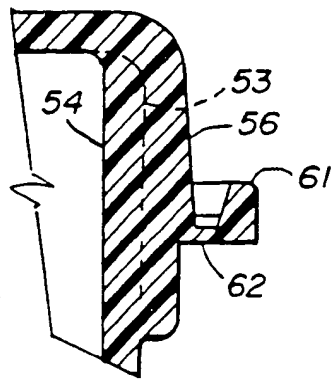


Fig. 8




Fig. 9

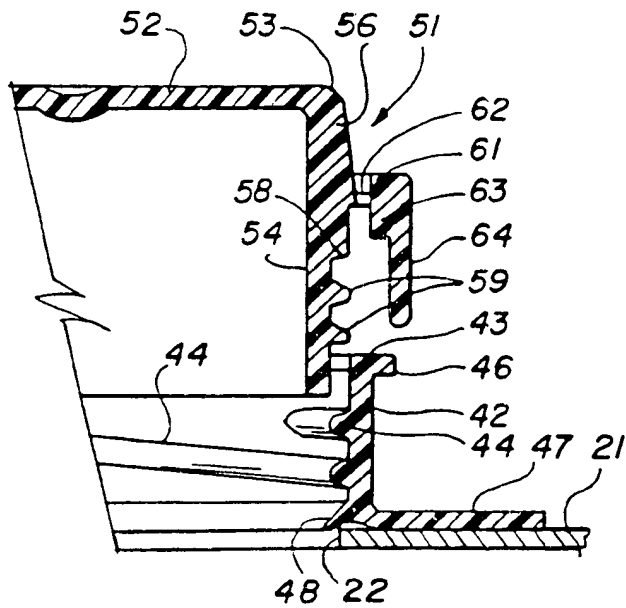


Fig. 10

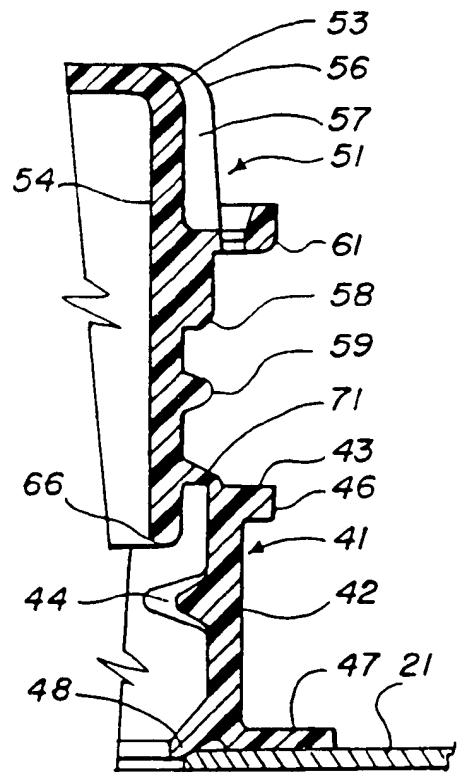
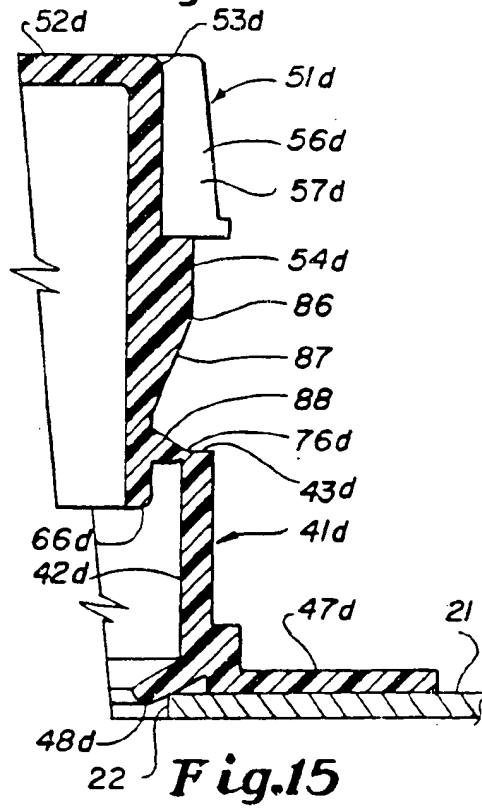
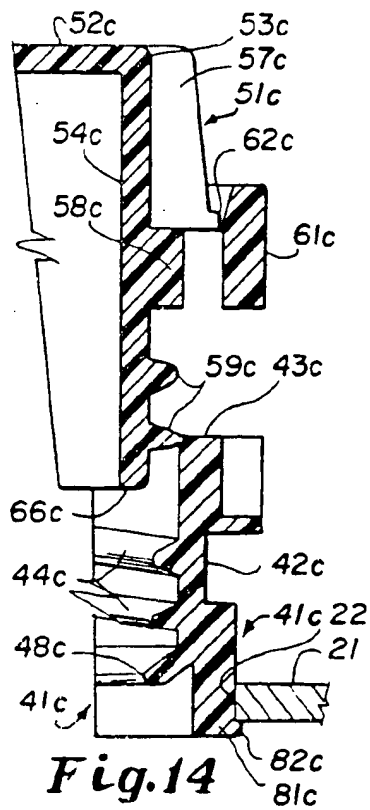
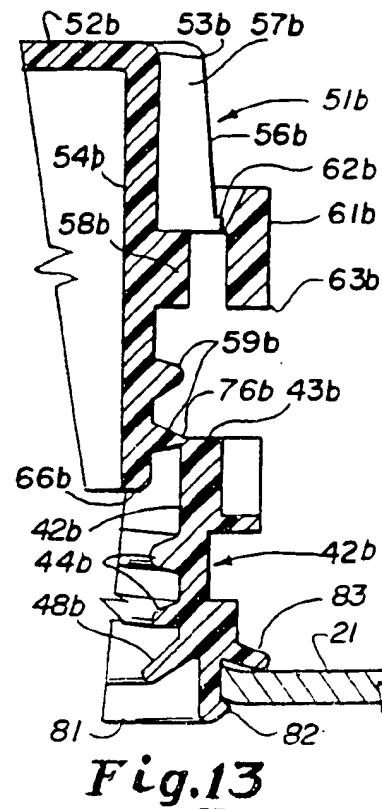
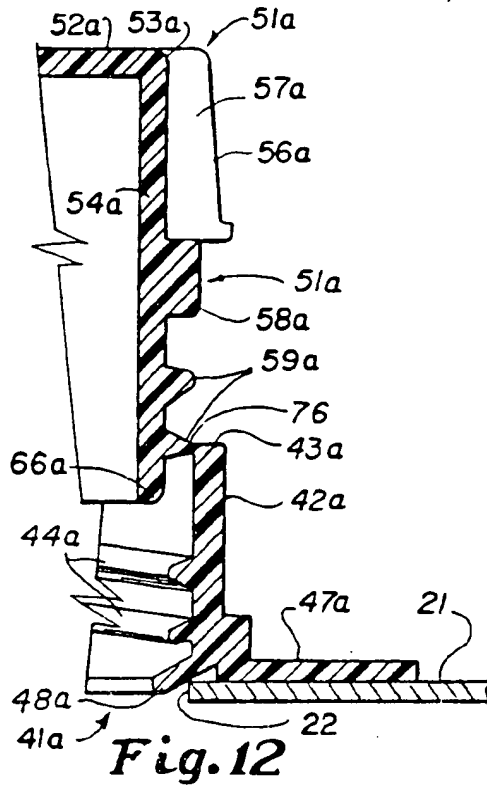
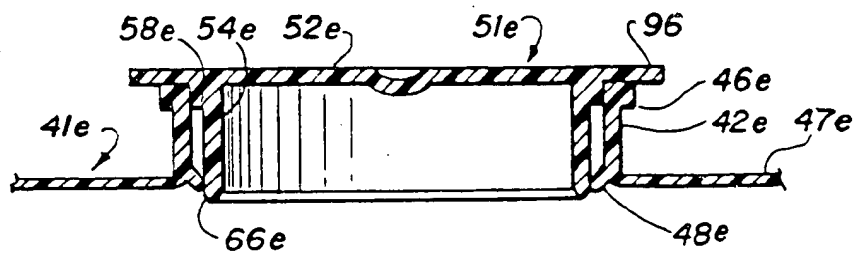
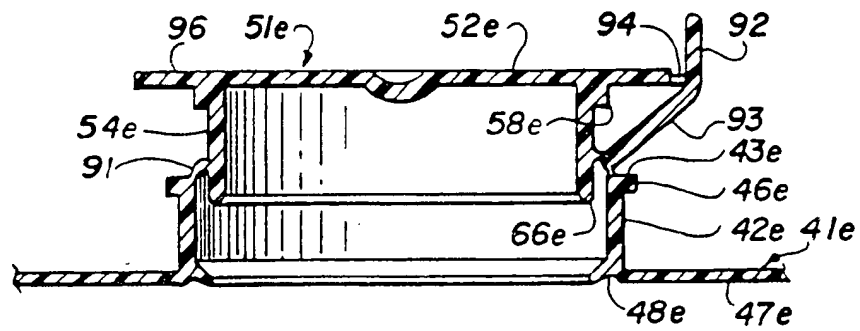
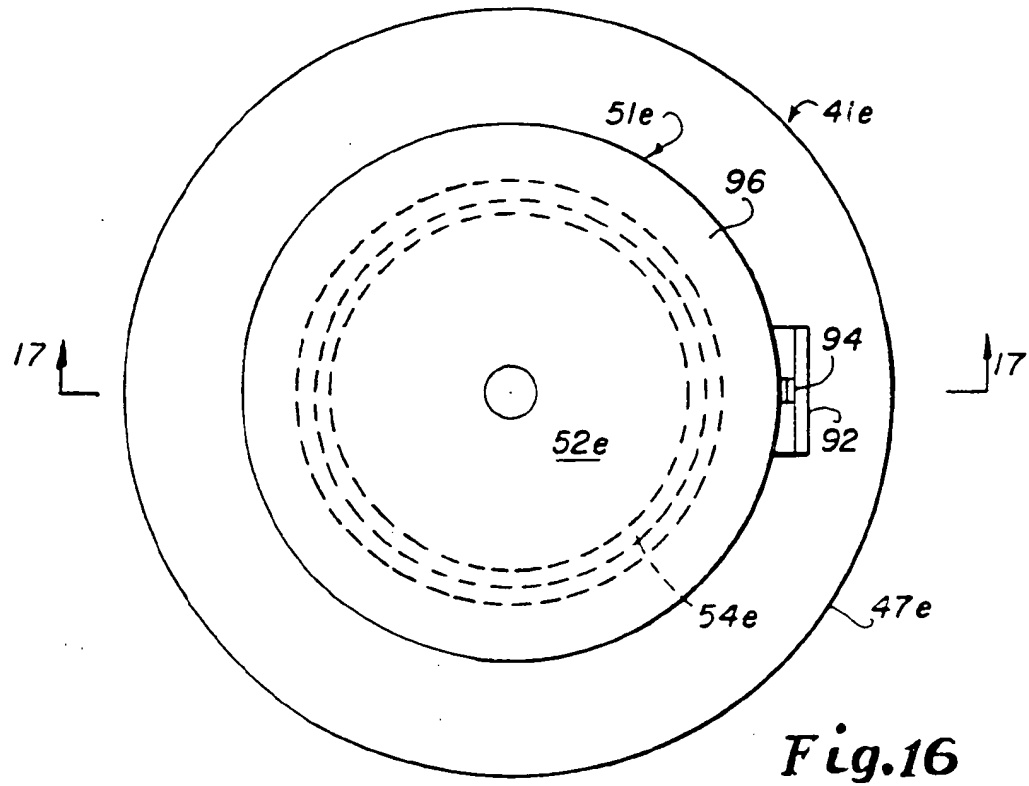


Fig. 11





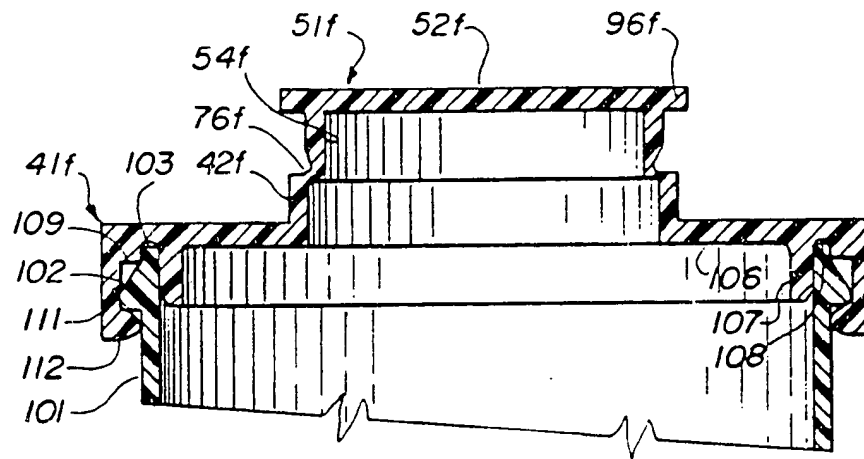


Fig.19

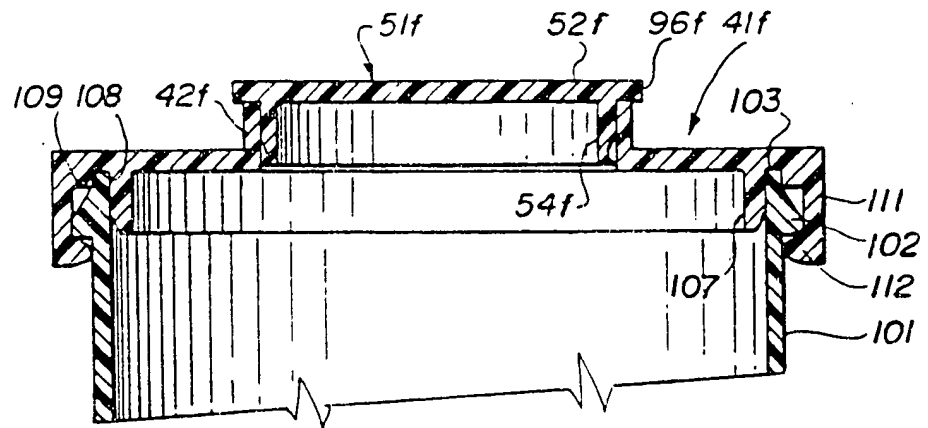


Fig.20



(11) Publication number : **0 502 716 A3**

(12) **EUROPEAN PATENT APPLICATION**

(21) Application number : **92301866.7**

(51) Int. Cl.⁵ : **B65D 43/04, B65D 39/04,
B65D 39/08, B65D 39/16**

(22) Date of filing : **04.03.92**

(30) Priority : **05.03.91 US 664658**

(43) Date of publication of application :
09.09.92 Bulletin 92/37

(84) Designated Contracting States :
**AT BE CH DE DK ES FR GB GR IT LI LU MC NL
PT SE**

(88) Date of deferred publication of search report :
30.08.95 Bulletin 95/35

(71) Applicant : **CAP SNAP CO.**
890 Faulstich Court
San Jose California 95112 (US)

(72) Inventor : **Luch, Daniel**
890 Faulstich Court
San Jose, California 95112 (US)
Inventor : **Adams, Brian M.**
890 Faulstich Court
San Jose, California 95112 (US)

(74) Representative : **Mayes, Stuart David et al**
BOULT, WADE & TENNANT
27 Fumival Street
London, EC4A 1PQ (GB)

(54) **Spout fitment closure plug.**

(57) For tent-type paperboard containers as well as other containers, a fitment (41) is attached surrounding a hole (22) in the container (21). The spout (42) has internal threads (44) and an external flange (47) which seals around the hole (22) and is fixed to the container (21) by thermal means, adhesive or the like. The cap (51) has a top disk (52) from which an externally threaded skirt (54) depends. The exterior of the skirt (54) has gripping ribs (56) to assist in screwing and unscrewing the cap (51). The lower edge (66) of the skirt (54) seals against a sealing membrane (48) on the spout (42). Surrounding the skirt (54) is a tamper-evident band (61) attached to the lower edges of the ribs (56) by frangible bridges (62). The tamper-evident band (61) has locking means (63) engaging complementary locking means (46) on the spout (42). Thus the cap (51) cannot be unscrewed without removing the tamper-evident band (61). By unique design, the spout (42) and cap (51) may be molded in one mold cavity.

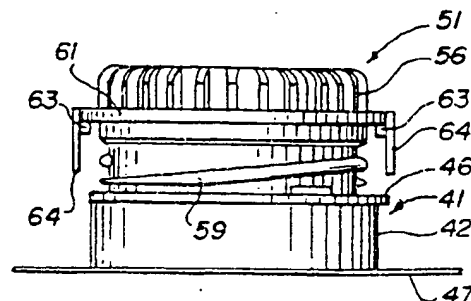


Fig.2



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

DOCUMENTS CONSIDERED TO BE RELEVANT			EP 92301866.7
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 5)
A	<u>US - A - 3 966 080</u> (BITTEL) * Totality, especially fig. 1-5 * ---	1-18	B 65 D 43/04 B 65 D 39/04 B 65 D 39/08 B 65 D 39/16
A	<u>US - A - 3 998 354</u> (SONG) * Totality, especially fig. 1-5 * ---	1-18	
A	<u>DE - A - 2 849 681</u> (NOROPLAST-VERPACKUNGEN) * Totality, especially fig. 1-6 * ---	1-18	
A	<u>DE - A - 2 923 785</u> (SUPERFOS EMBALLAGE) * Totality, especially fig. 1-6 * -----	1-18	
			TECHNICAL FIELDS SEARCHED (Int. Cl. 5)
			B 65 D 17/00 B 65 D 39/00 B 65 D 41/00 B 65 D 43/00
The present search report has been drawn up for all claims			
Place of search VIENNA		Date of completion of the search 22-06-1995	Examiner WERNER
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

FORM KUMI (ISO 1032) (1/04/95)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.